Unit - 4

Reinforced Earth

Reinforced earth - principles - Component of reinforced earth - design principles of reinforced earth walls stability checks - Soil nailing.

* Definition of Reinforced Earth: —

Reinforced earth is a Composite material (base material + reinforcement) that due to interficial friction forces offers resistance to both static and dynamic loads.

(*) Basic principles of soil reinforcement that are already existing in nature and are demonstrated by animals, birds and plants.

(*) The scientific basis for the modern concept of soil reinforcement lies in the idealisation of the problem of soil reinforcement in the form of a weak soil reinforced by high strength thin horizontal membranes.

(*) Based on the Vidal's Concept of Interaction between the soil and the reinforcing horizontal membranes is solely by friction, generated by gravity.

(*) Reinforced soil is somewhat analogous to reinforced Concrete. But direct Comparision

www.Jntufastupdates.com Scanned by CamScanner

between the function of reinforcement in the two cases is not valid.

* The supporting capacity of soft, compressible ground may be increased and the settlement may be reduced through use of Tensile reinforcement in the direction parallel to the applied stresses.

* Commanly used compression reinforcement elements include columns and walls formed in-situ using gravel, sand, soil cement, soil-lime or admixtures.

* Design principles of Reinforced Earth wall :—

Henry Vidal 1969. a French Engineer developed the concept of reinforced structures from a very sample observation while playing with his daughter in beach. He observed that sand moulds with several layers of fine needles introduced into them. would stand a steeper than sand moulds without needles. Those observations paved away for developing the Technology of reinforced earth.

→ The reinforced earth is a composite material It is composed of the soil as backfill, flexible

www.Jntufastupdates.com Scanned by CamScanner

reinforcement placed within the soil which increases the shear strength of soil.

The flexible reinforcement in the form of strips, fibers interacts frictionally with the soil and increases the shear strength.

The Concept of reinforcing the soil with the additives of strips or fibers is not new. Earlier attempts have been made to increase the stability of slopes by roots of plants and Trees for early Concepts of reinforcing the soil.

It is Henry Vidal, who by introducing the phenomenon of frictional interaction between the flexible reinforcement and the backfill material. After an extensive study for a period of 5 years including the model studies, he proposed that the association of two materials. i.e backfill material and the reinforcement will result in a new Composite material ads reinforced earth.


The first reinforced structure modeled by Vidal was successfully built in 1966. It was a 6m retaining wall.

The original structure of reinforcing earth wall in the form of retaining walls

www.Jntufastupdates.com Scanned by CamScanner

Consists of the following three components.

* Granular Graded material or soil as the backfill material.
* The flexible reinforcement in the form of strips, rods etc.
* The facing or skin element made of precast Concrete.

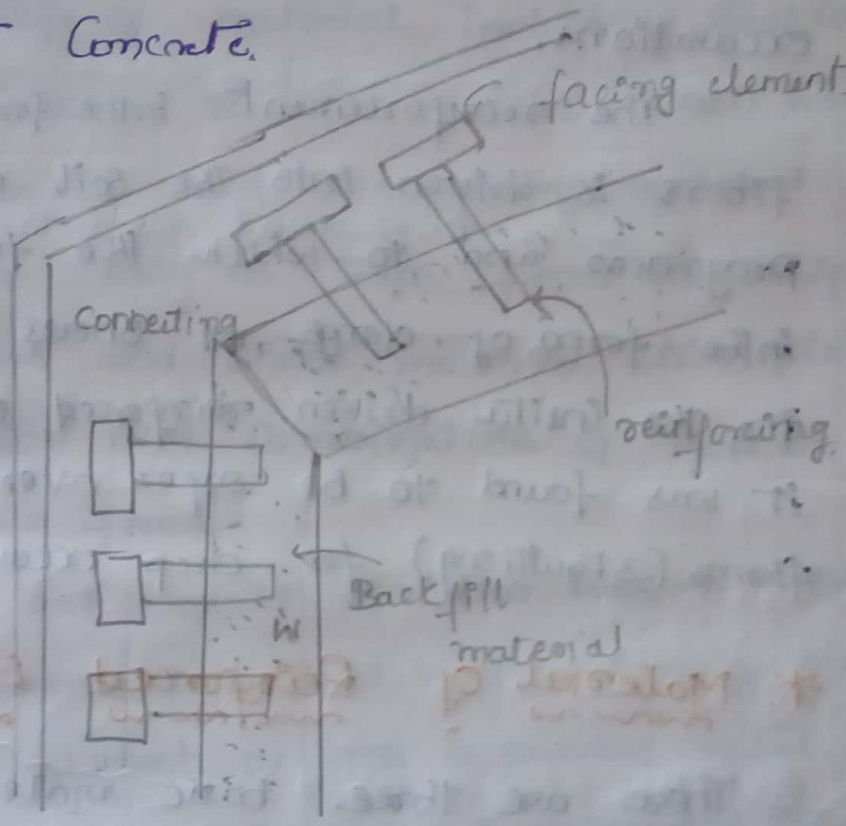

Major elements of Reinforced Earth wall.

* Advantages of Reinforced Earth wall :-

1. Economy :- More economical than Conventional Structure by 40 %.

2. Flexibility of reinforcing Material :-

This makes it possible to build on any type of foundation soil without major problems

www.Jntufastupdates.com Scanned by CamScanner

reinforcement placed within the soil which increases the shear strength of soil.

The flexible reinforcement in the form of strips, fibers interacts frictionally with the soil and increases the shear strength.

The Concept of reinforcing the soil with the additives of strips or fibers is not new. Earlier attempts have been made to increase the stability of slopes by roots of plants and Trees for early Concepts of reinforcing the soil.

It is Henry Vidal, who by introducing the phenomenon of frictional interaction between the flexible reinforcement and the backfill material. After an extensive study for a period of 5 years including the model studies, he proposed that the association of two materials. i.e backfill material and the reinforcement will result in a new Composite material ads reinforced earth.


The first reinforced structure modeled by Vidal was successfully built in 1966. It was a 5m retaining wall.

The original structure of reinforcing earth wall in the form of retaining wall

www.Jntufastupdates.com Scanned by CamScanner

Consists of the following three components.

* Granular Graded material or soil as the backfill material.
* The flexible reinforcement in the form of strips, rods etc.
* The facing or skin element made of precast Concrete.

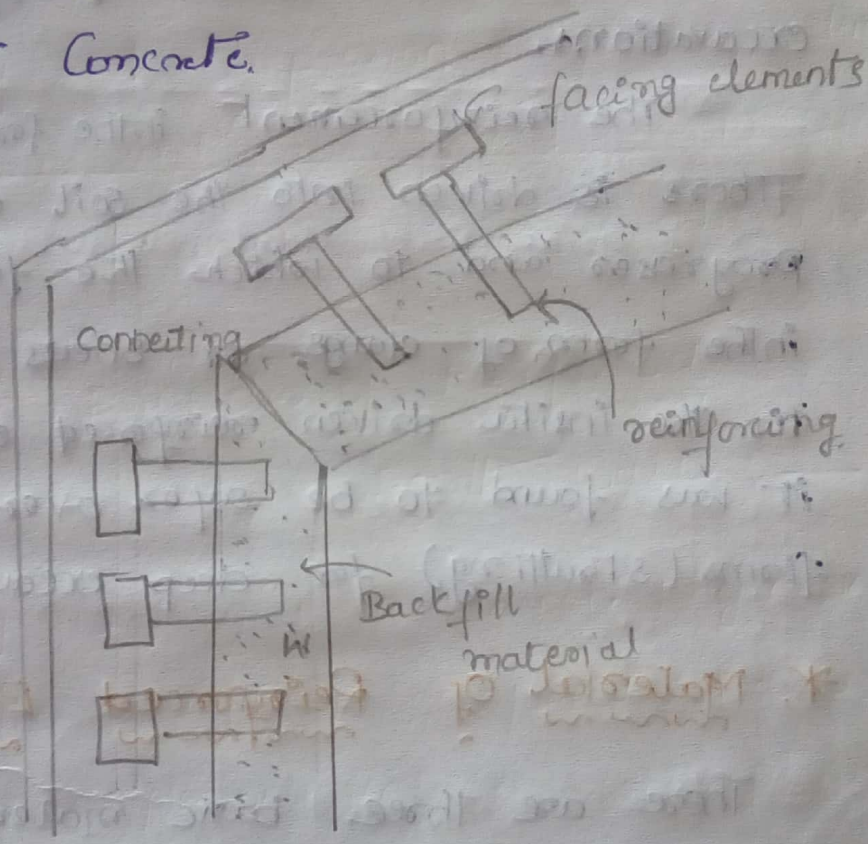

Major elements of Reinforced Earth wall.

* Advantages of Reinforced Earth wall :—

1. Economy :— More economical than Conventional Structure by 40-1.

2. Flexibility of reinforcing Material :—
This makes it possible to build on any type of foundation soil without major problems

www.Jntufastupdates.com Scanned by CamScanner

3. pre fabrication and ready availability of Consecutive elements which accelerate the Construction process.

In Contrast to Henry Vidal type of reinforced earth Construction, the Concept of nailed or insitu driven type of reinforced earth has been developed for the suitability of deep cuts and excavations.

The reinforcement inthe form of bars or fibers is driven into the soil as the excavation progresses and to which the facing elements in the form of clangs or sheets are fixed In the insitu driven reinforced earth Construction it was found to be safer over the Conventional firms (strutting) for deep excavation.

* Material Of Reinforced Earth :-

There are three basic material or material Composites required in the Construction of any reinforced soil structure. They are

(i) soil or fill matrix

(ii) reinforced or anchor system

(iii) a facing if necessary

1 Soil or fill :- The shear propertion of soil can be improved as the Theoritically any soil could be used to form earth reinforced structure.

www.Jntufastupdates.com Scanned by CamScanner

→ In long term conventional structure the soil used is usually well graded cohesionless fill or good cohesive frictional fill although pure cohesive soils have been used with success.
→ The only disadvantage is its cost.

2. Reinforcement :-

A variety of material including steel, concrete, glass, fibre, wood, rubber, aluminium, and thermo plastics can be used as reinforcing material. Reinforcements may be Take from the strips, grids, anchors and sheet material, chin, planks rope, vegitation and combinations of these or other materials forms.


Grids and geogrids age also used as reinforcement Grids are formed from steel in the form of plain or galvanised weldmesh or form expanded metal. Grids formed using polymers are ~~reinforced~~ referred to as geogrids ~~(exceptained)~~ and are normally in the form of an expanded proprietary plastic product.

(*) Applications of Reinforced Earth


Application areas for the use of earth reinforcements are very many. Jones (1985) identifies several soil reinforcement field applications.

www.Jntufastupdates.com Scanned by CamScanner

viz. bridge works, dams, embankments, foundations, highways, housing, industry, military, railways, root pile system, pipe works, waterway structures and underground structures. The application relavent to ground improvements are shown.

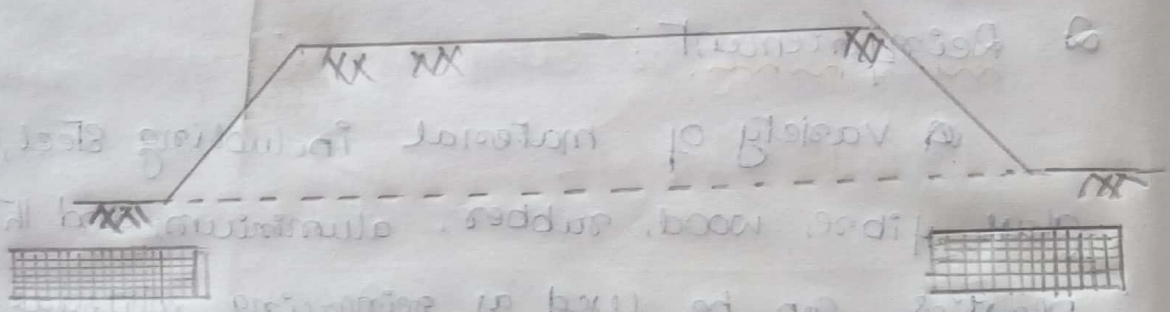


(a) Geogride Reinforcement of subsoil Beneath Embankment

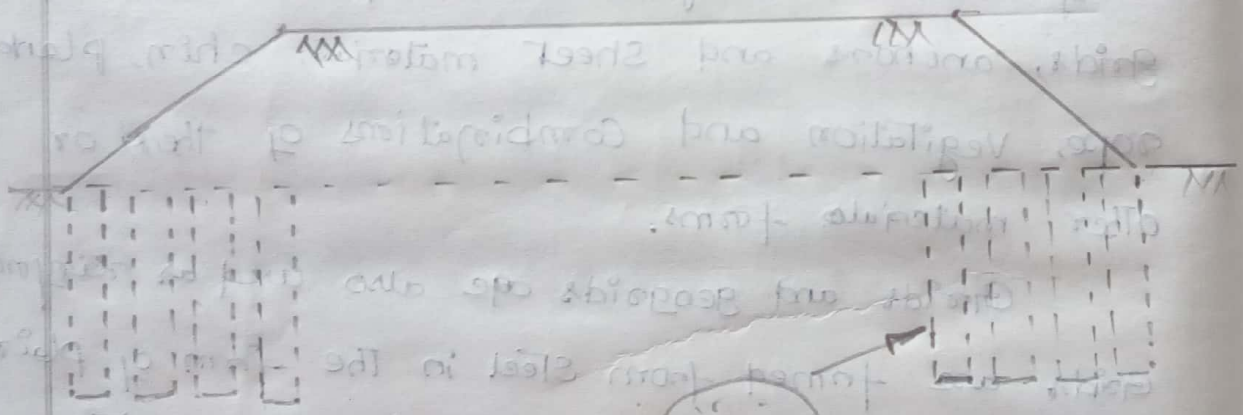

(b) Stone columns formed from GeoGrideTube




(c) Foundation in urban condition

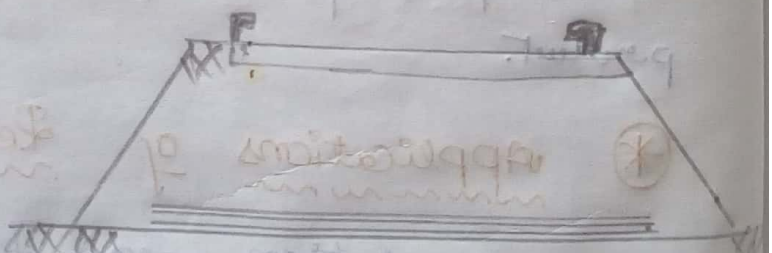

(d) Reinforced Earth slab over cavities in sub soil

www.Jntufastupdates.com Scanned by CamScanner

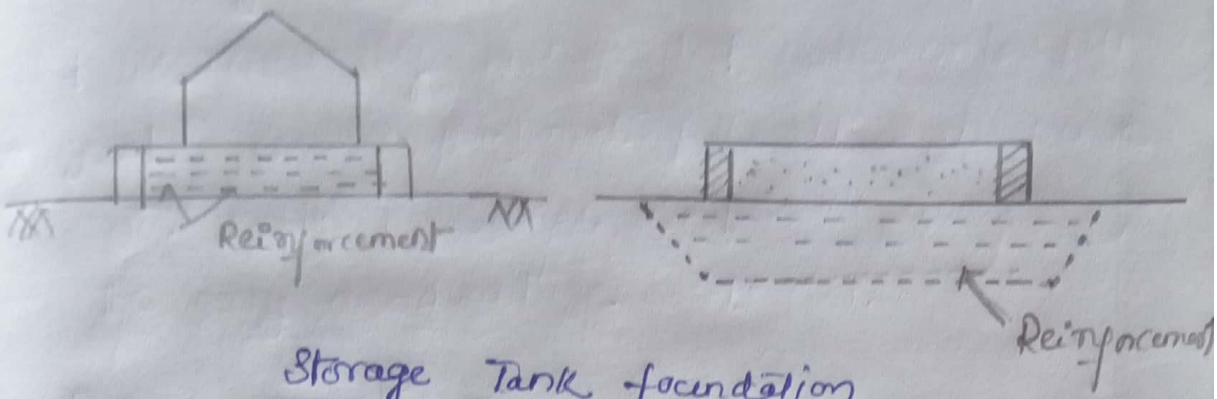

Storage Tank foundation

Some application of soil Reinforcement in Ground improvement.

Application	Material
1. Geogrid web or column foundation on weak subsoil fig a, b	- for embankment - Geogrid reinforcement
2. Foundation in urban Condition fig(c)	- spray Concrete facing and steel nail reinforcement
3. Reinforced Earth slab over Cavities in subsoil fig d,	- Strip or grid reinforcement and selected fill no facing are required
4. Reinforced foundation beneath storage Tanks, fig (f)	- Grid reinforcement and granular fill

www.Jntufastupdates.com Scanned by CamScanner

UNIT – 4


:ced Earth:

The concept of combining of two materia
of different strengths characteristics to form a Compos
material of greater strength is quite familiar in
Civil engineering practices and in use for ages.
The reinforced Concrete Constructions are examples for
Such Composite materials. It combines the high
tensile strength of steel with the high Compressive
but relatively low tensile strength of Concrete.
likewise Soils which have little if any tensile
Strengths can also be Strengthened by the inclusion
of materials with high tensile strength. This
mobilisation of tensile strength is obtained by
Surface Interaction b/w the Soil and the
reinforcement through friction and adhesion.
The reinforced Soil is obtained by placing
extensible or In extensible materials Such as
metallic Strips or polymeric reinforcement
within the Soil to obtain the requiste properties


www.jntufastupdates.com

Soil reinforcement through metallic strips, grids or meshes and polymeric strips sheets is now a well developed and widely accepted technique of earth improvement. Anchoring and Soil nailing is also adopted to improve the Soil properties.

The use of reinforced earth technique is primarily due to its versatility, cost effectiveness and ease of construction. The reinforced earth technique is particularly usefull in urban location where availability of land is min and construction is req. to take place with min. disturbance traffic.

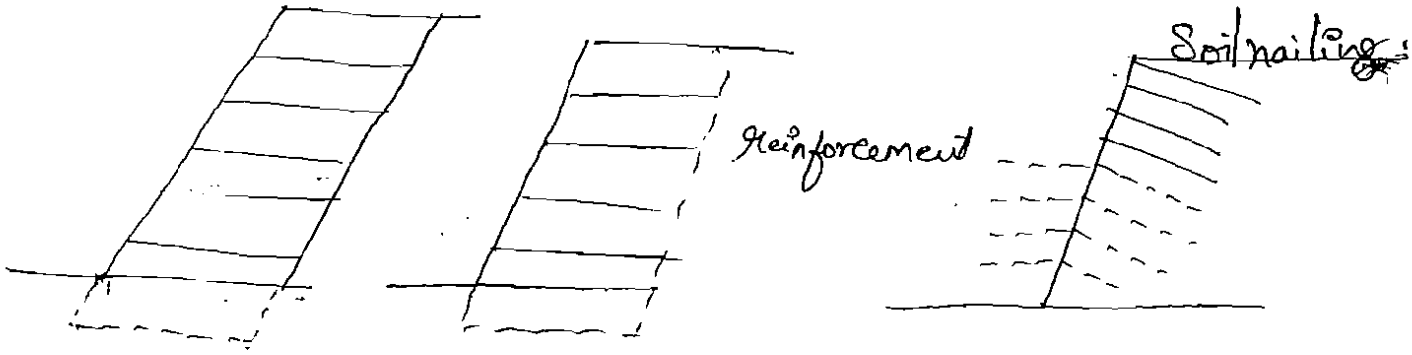

Reinforced Slopes.

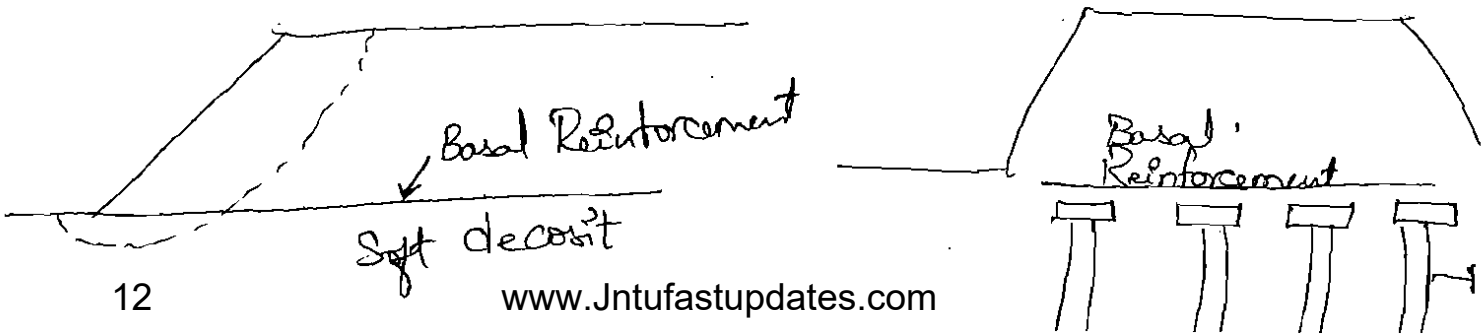


www.Jntufastupdates.com

Concept of Soil Reinforcement:

Reinforced Soil refers to a soil which is strengthened by a material able to resist tensile stresses and which interacts with the soil through friction/adhesi

Soil reinforcing Mechanisms in wall and Slopes:

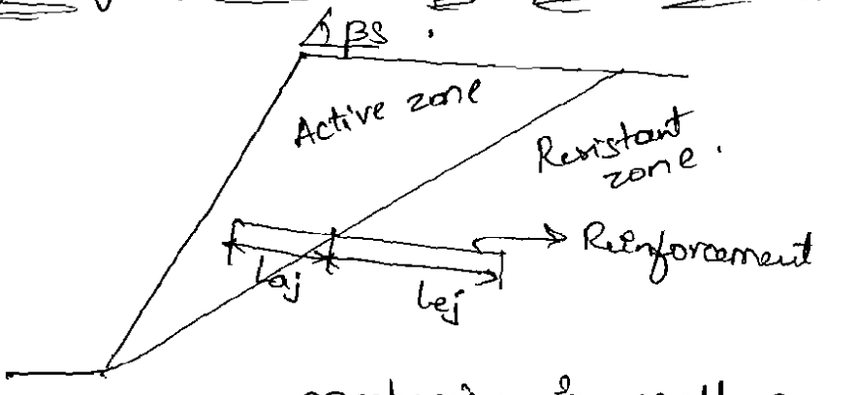

mechanism in wall and Slopes.

- β_s is the Slope of dry ~~cho~~cohesion less Soil with a face Inclined at β_s.
- Where β_s is greater than the internal angle of Shearing resistance.
- Without the benefits of Soil reinforcement the Slope may be would collapse, however by the incorporation of Suitable Soil reinforcement the Slope may be rendered Stable,
- Investigation of the basic reinforcing mechanism reveals that the Soil in the Slope Comprises two distinct zones viz. active zone and the

www.Jntufastupdates.com

resistant zone. Without reinforcement the active zone is unstable and tends to move outwards and downwards with respect to the resistant zone. If soil reinforcement is installed across the active & resistant zones it can serve to stabilize the active zone. fig shows a single layer of reinforcement with a length of 'L_{aj}' embedded in Active zone and length 'L_{ej}' embedded in the resistant zone. The embedded length of 'L_{ej}' should be sufficient enough to mobilise enough bond strength b/w the soil & reinforcement to resist the disturbing force caused by active zone. The tensile strength of the reinforcement is not constant but it decreases towards the free end of 'L_{ej}' and it is zero at the end.

flexible reinforcement is incorporated in fill during construction. Consequently the layers of reinforcement are horizontal. Inextensible reinforcement

www.Jntufastupdates.com

is also inserted into cut sections during construction (in the form of soil nails) at inclinations close to the horizontal. This inclination is convenient since it coincides with the general inclinations of the tensile strength developed in the soil in the active zone.

Soil reinforcement interaction:

For soil reinforcement interaction to be effective reinforcement is required absorbs strains which would be otherwise cause failure. In this content can ultimate state of collapse in terms of interacti with the soil and reinforcement this state can be bought by rapture of reinforcement or failure of bond between soil and reinforcement. In serviceabili limit state is occurred when deformation occurs beyond serviciable limit or strain within the reinforcement exceed prescribed limit.

If the soil is cohesion less the bond resistance will be friction and will depend upon.

www.Jntufastupdates.com

Surface roughness and soil. If soil is cohesive the bond stress will be adhesive.

In case of grid reinforcement the bond stress will be governed by the shear strength of the soil and roughness of the reinforcement.

Having absorbed load it is necessary for the reinforcement to sustain this load during the design life without rupture or without suffering time dependent deformation which might give rise to serviceability limit. To maximise the tensile load capacity the flexible reinforcer are installed horizontally to coincide with the principle tensile strain. The axial forces adsorbed by the reinforcement are statically determined.

Soil properties req to be taken into Considerat

The soil property required to be taken into consideration are effective shear strength

www.Jntufastupdates.com

parameter 'c' and 'ϕ' which are obtained by taking into consideration pore pressure within the soil. However shear strength of fill or soil incorporating multiple layer of reinforcement.

In wall and slope load imposed on the soils reinforcement will increase if positive pore water pressure are allowed to develop. The development of adverse pore pressure in reinforcement fill will can be prevented by providing appropriate drainage. In case the development of pore water pressure is unavoidable in water front construction increased reinforcement is required to be considered


In addition to physical interaction of soil & reinforcement electro chemical interaction is also required to be considered for design life to assess the durability.

www.Jntufastupdates.com

Components of Reinforced Earth Structure:

it Consists of 3 main Components

(i) Reinforcing element
(ii) Soil back fill
(iii) facing element.

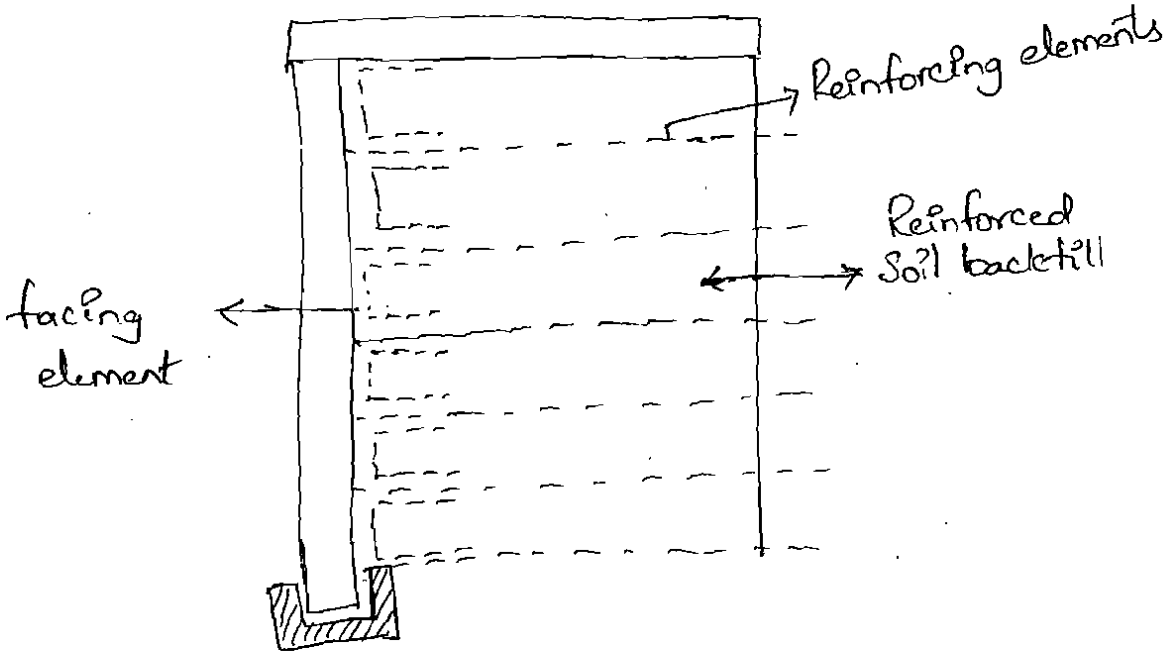

Reinforcing element:

different types of reinforcing materials are in use such as Steel, Concrete, glass fibre, wood, rubber aluminium and thermoplastics. Reinforcement may take the form of Strips, grids, anchors and Sheet material, chain p rope, Vegetation & Combinations of these or other mat forms.

Types of reinforcing materials:

www.Jntufastupdates.com

→ Strips

→ planks

→ geo grids & grids.

→ Sheet reinforcement

→ Nailing.

→ Anchors

→ Composite reinforcement

Strips: These are flexiable linear element normally having their breadth 'b' and thickness 't'. (B → t). dimensions vary with application and structure, but are usually within the range t = 3-5mm and B = 5-100mm. The most common Strips are metals. The form of Stainless, galvanized or Coated Steel Strips being either plain or having several protrusions such as ribs or gloves to increase the friction between the reinforcement and the soil/back fill. Strips can also be formed from aluminium, copper polymer and glass fibres reinforced plastic (GRP). Reed & Bamboo reinforcements are normally Categorized as Strips as are chains.

Planks: Similar to Strips except that their form of Construction makes them Stiff. planks can be formed from timber, reinforced Concrete or prestressed

www.Jntufastupdates.com


Concrete. The dimensions of Concrete planks vary; however reinforcements with thickness 't' = 100mm & 'B' = 200-300 are used. They have to be handled with care as they can be Susceptible to cracking.

Grids & geogrids:


Reinforcing elements formed from transverse & longitudinal members, in which transverse members run parallel to the face or free edge of the structure and behaves as abutments or anchors. The main purpose is to retain the transverse member in position. Since the transverse members act as an abutment or anchor they need to be stiff relative to their length. The longitudinal members may be flexible having a high modulus of elasticity not Susceptible to Creep. The pitch of the longitudinal members, P_L is determined by their load carrying Capacity & the Stiffness of the transverse elemer The pitch of the transverse elements, P_T depen

www.Jntufastupdates.com


upon the internal Stability of the Structure under Consideration A Surplus of longitudinal & ~~Verti~~-transverse elements is of no Consequence provided the soil or fill can Interlock with the grid.

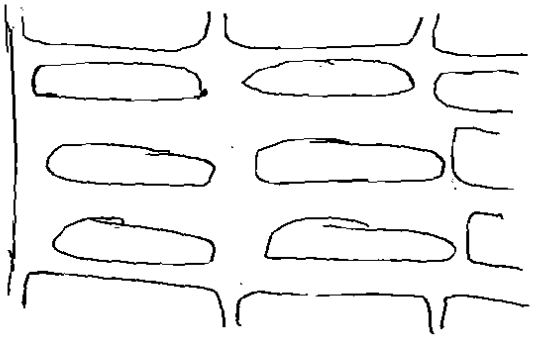

mono oriented geogrid.

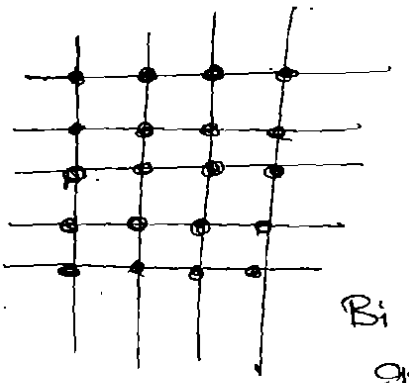

Bi oriented geogrid.

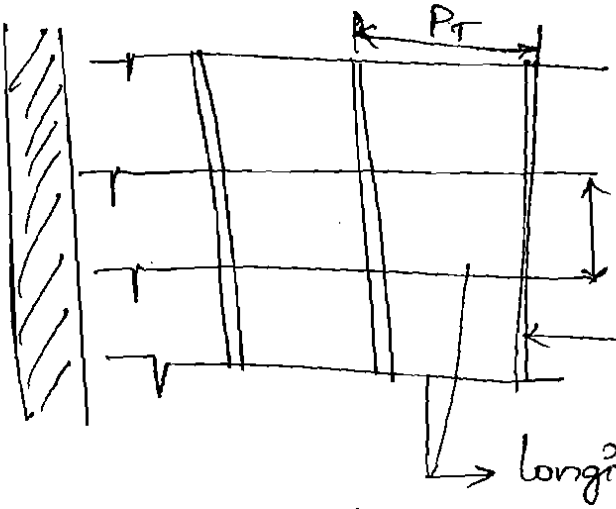

Grids are formed from steel in the form of plain (or) galvanized weldmesh, or from expanded metal.


Grids formed from polymers are known as 'geogrids'.

www.Jntufastupdates.com

Sheet reinforcement: may be formed from metal such as galvanized sheet, fabric (textile) (or) expanded metal not meeting the criteria for a grid.

Nailing: Earths are/may be protected by geosynthetics with earth nailing.

Anchors: flexible linear elements having one (or) more distortions which act as abutments or anchors in the fill or soil. They may be formed from steel, rope, plastic (or) combination of materials such as webbing & tyres, steel & tyres, or steel & concrete.

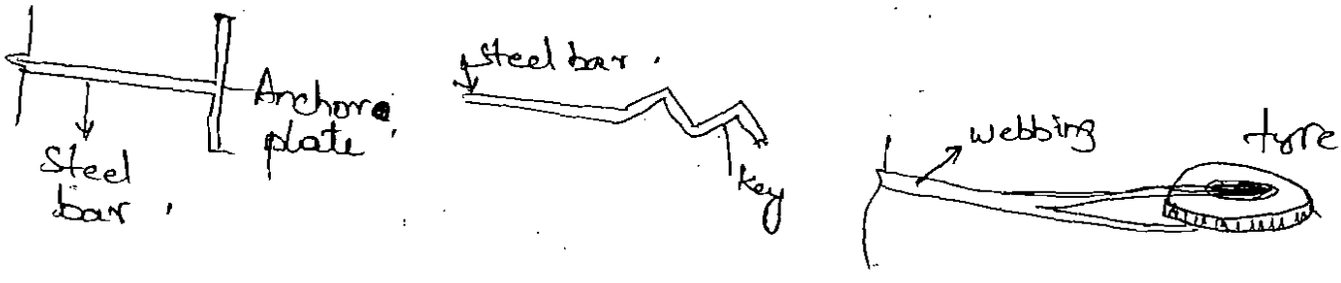


Composite reinforcement:

Reinforcement can be in the form of combination of materials & material forms such as sheets & strips, grid & strips & anchors, depending upon the requirements.

www.Jntufastupdates.com

In reinforcement with polymers, polymeric joints are required. polymeric reinforcement joints are subdivided into prefabricated joints made during execution of the works. A number of different jointing systems are in use. joints in geotextiles should normally be seen where load transference is needed. for polymeric meshes or grid a badkin may be employed. A Badkin joint is an effective method of joining some polymeric grid reinforcement.



Badkin joint.

Tensar Bodkin.

Care should be taken to ensure that

(1) Badkins have sufficient c/s area and strength to avoid excessive deformations.

(2) Badkins are not so large as to distort the parent material causing stress concentrations.

(3) joints are pre-tensioned prior to loading, to reduce joint displacement as the components lock together.

www.Jntufastupdates.com

Soil Backfill : The fill material for reinforced earth structures shall be preferably cohesionless and it should have an angle of on interface friction b/w the compacted fill & the reinforcing element of not less than 30, measured in accordance with IS 13326 part(1). The soil should not react chemically or electrically with the reinforcing element in an adverse manner.

A wide variety of fill types can be used with the grids including crushed rock, gravel industrial slag, pulverised fuel ash & clay, but fill particles greater than 125mm should be avoided.

facing element:

facings may be 'hard' or 'soft' and are selected to retain fill material, prevent local slumping and erosion of steeply sloping faces, and to suit environmental requirments.

The facing shall comprise of one of following:


www.Jntufastupdates.com

(i) Reinforced Concrete Slabs.


(ii) plain Cement Concrete form fill hollow block (precast).

(iii) Masonry Construction, rubble facia.


(iv) other proprietary and patented proven System.

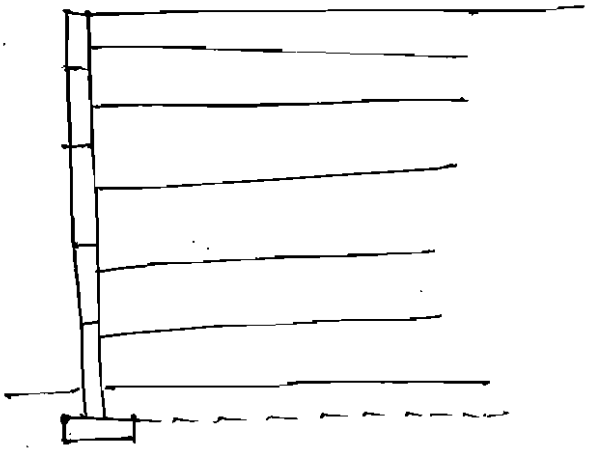

Discrete panels

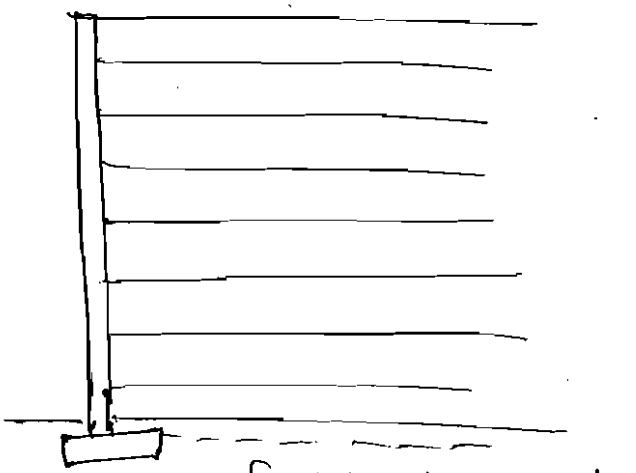

full length panels.

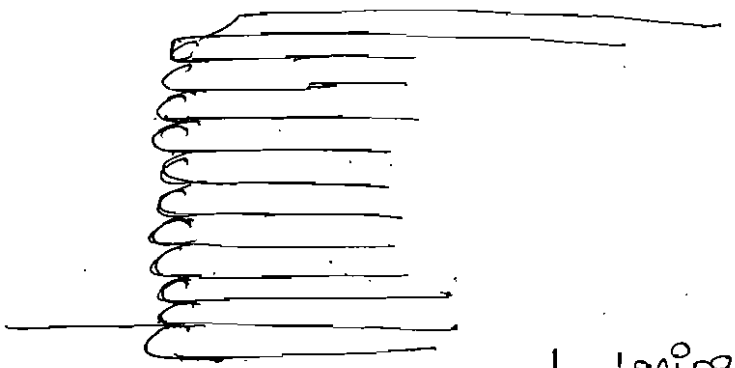

Wrap around facing.

Hard facings


facing may Consists of Concrete, Steel Sheet


Steel grids, timber, proprietary materia

www.Jntuastupdates.com

Standard or combination of these. they should conform to the appropriate material standard and should be sized by normal design procedures using the appropriate standard.

Interlocking concrete blocks, grout filled bags or gabions can provide a substantial facing.

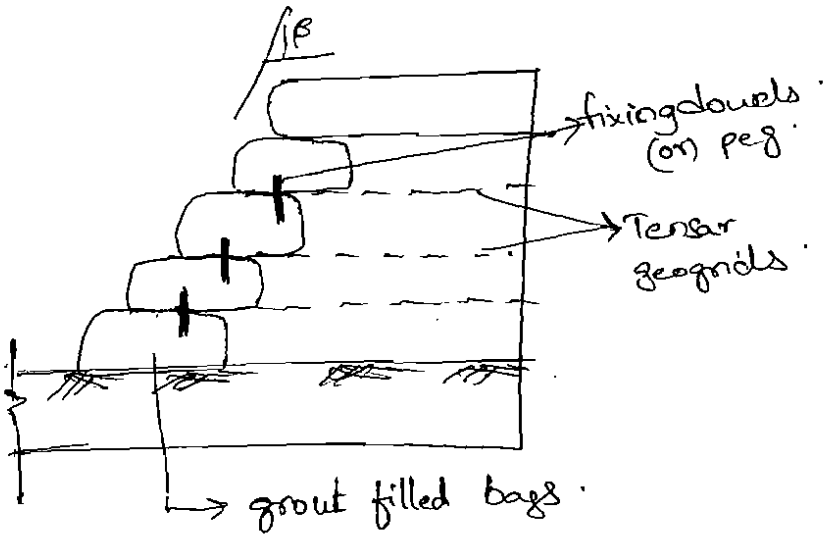

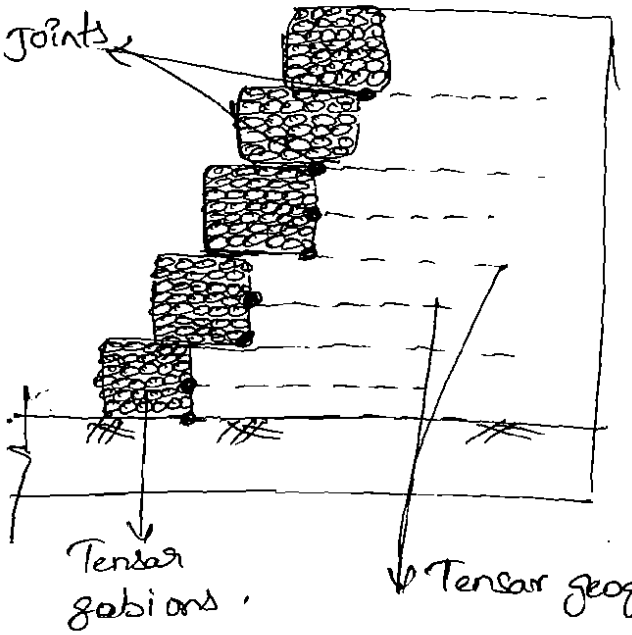


Hard facing


Soft facings

generally, external temporary formwork is erected to support the face during the construction of steep slopes (>45°). It can take the form of a lightweight system of scaffold tubes and boards or consists of some form of 'climbing' shutter. The grids are turned up the face of the framework and returned into the embankment directly

www.Jntufastupdates.com

below the next reinforcement layer. the two grids are connected using a high density polyethylene bodkin.

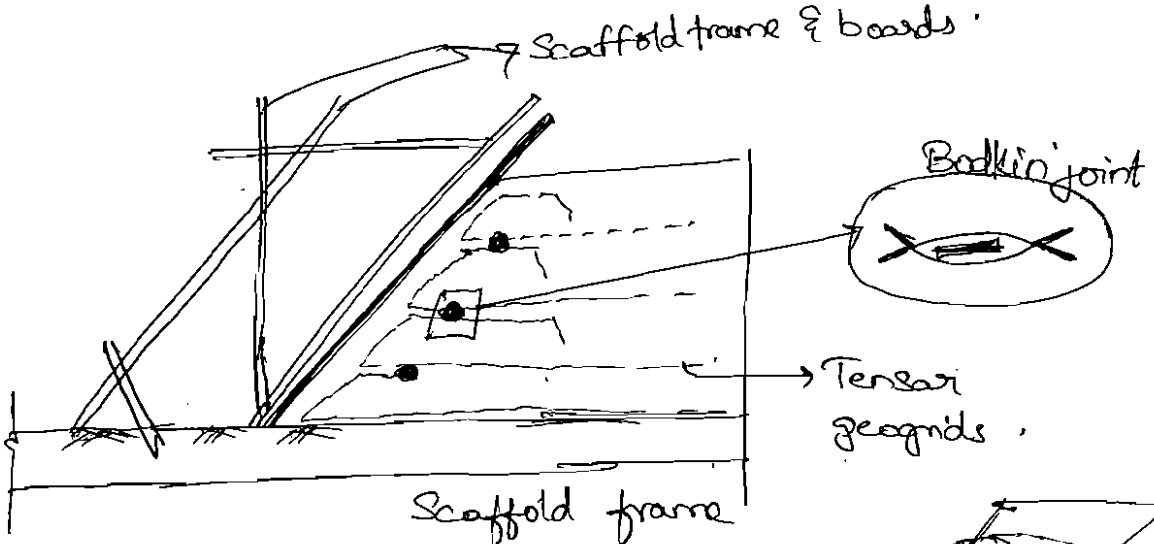

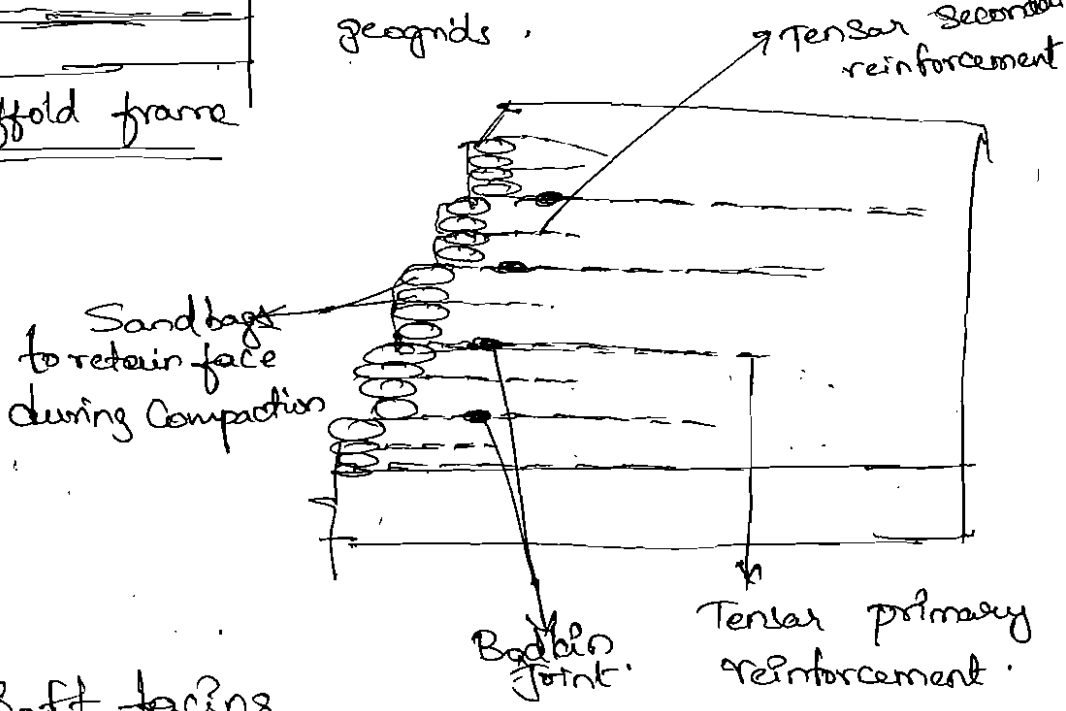

Turf & topsoil can be placed on the fill sides of the grid reinforcement as it is turned up the face of the slope to create a natural & aesthetic appearance.

Where the vertical spacing of the main reinforcement is greater than 600mm, biaxial grid reinforcement is used as intermediate Secondary reinforcement to provide local stability at the face of the slope.

www.Jntufastupdates.com

* fasteners are used to make a connection b/w the reinforcement and the facing and take the form of dowels, rods, hexagonal headed screws & nuts & bolts and may consist one of the following materials.

- plain steel
- Coated steel.
- galvanized steel
- Stainless steel
- polymers.

Design principles

general:

By its nature reinforced soil is a combination of structural & geotechnical engineering. The evolution of limit state design in structural engineering has led to the definition of a number of partial load factors which are applied to loads in design combinations & material factors which are applied to the structural components. In geotechnical engineering the application of partial factors to the various geotechnical parameter has not been found practical in general design & overall factors of safety are still used.

for the purposes of reinforced soil design, a limit state is deemed to be reached when one of the following occurs:

www.Jntufastupdates.com

(a) Collapse (or) major damage.

(b) deformations in excess of acceptable limits.


(c) other forms of distress (or) minor damage, which would render the structure unsightly require unforeseen maintenance.

The condition defined in (a) is the ultimate limite state. (b) & (c) are Serviceability limit states.


Stability checks:

Types of failures

If the major failure plane considered lies outside the reinforced earth mass, the failure is termed externa and is analyzed following Conventional Soil engineering practice. Internal failure can occur by rupture of the reinforcement; Slippage b/w the reinforcement and the surrounding soil; rupture, excessive deformation, or buckling of face elements; or failure of connections.

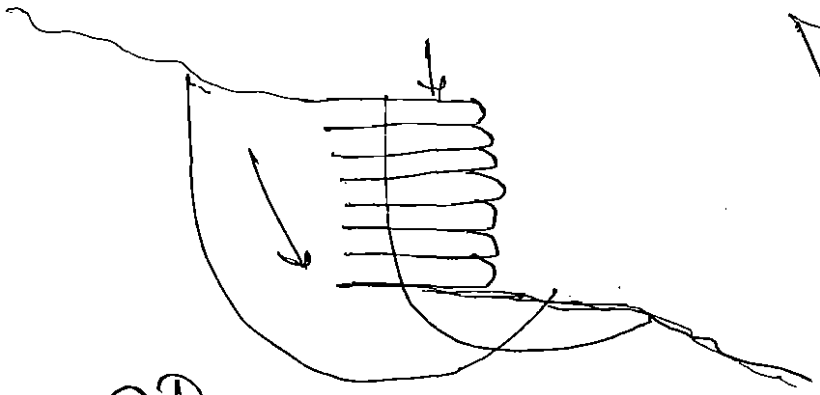


(1) Deep-Seated failure

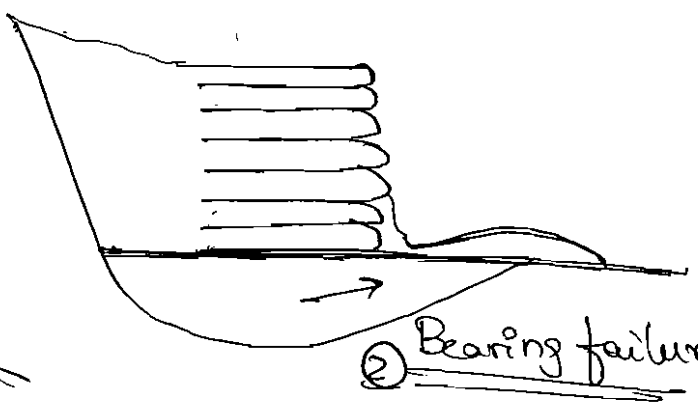


(2) Bearing failure


www.Jntufastupdates.com

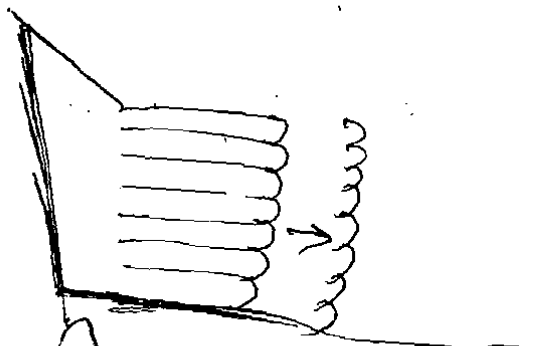


(3) Sliding failure.

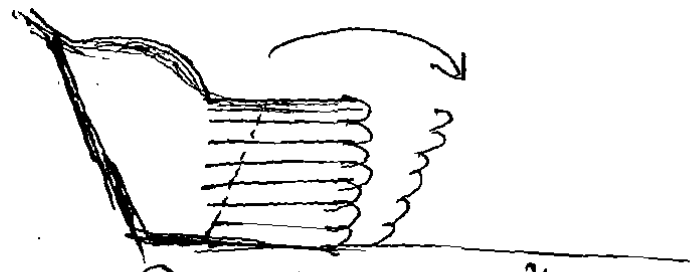


(4) Overturning failure.

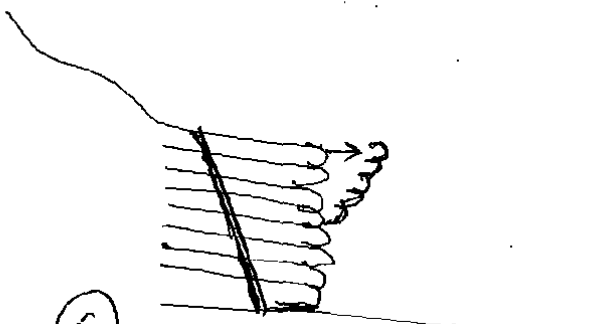

(5) Slippage of Reinforcement

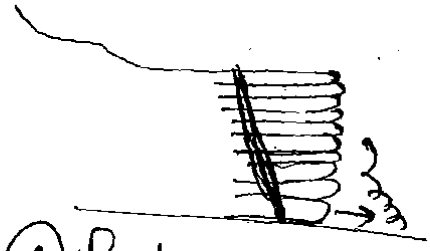

(6) Rupture of the Reinforcem

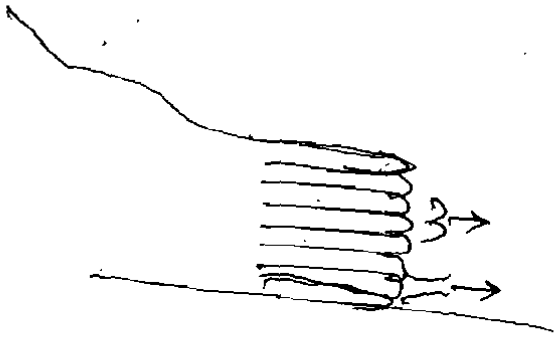


(7) Rupture, excessive deformation, (or) buckling of face elements or failure of connections.


(1) Deep - Seated failure: For the case of poor backfill material (behind the reinforced earth) and soft foundation Strata, a deep - seated Circular failure surface could form. For this case, Conventional slope stability analysis, eg, using the met of slices, yields a safety factor according to the definitio

$$F = \frac{\text{resisting moment}}{\text{driving moment}} = \frac{\text{moment of shear strength along fail arc}}{\text{moment of wt of failure}}$$


www.jntufastupdates.com

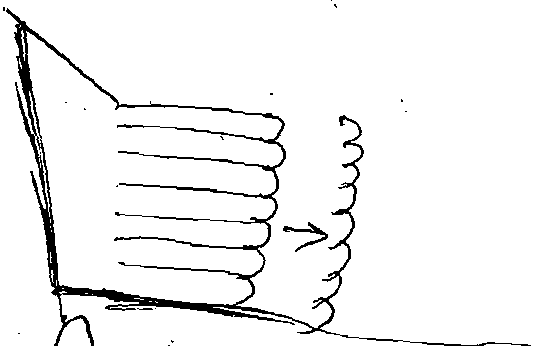


(3) Sliding failure.

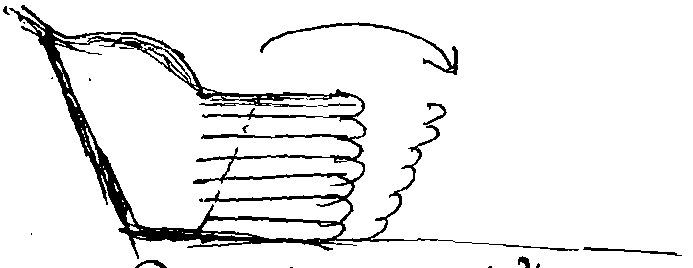


(4) Overturning failure.

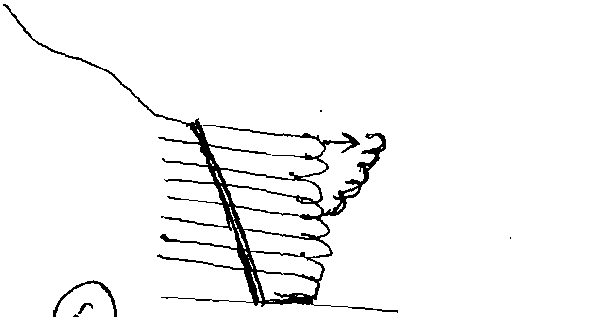

(5) Slippage of Reinforcement

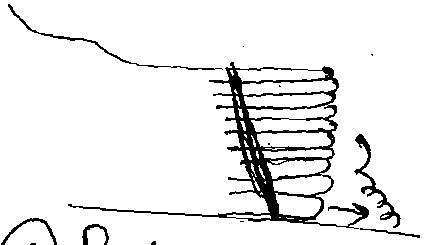

(6) Rupture of the Reinforcem

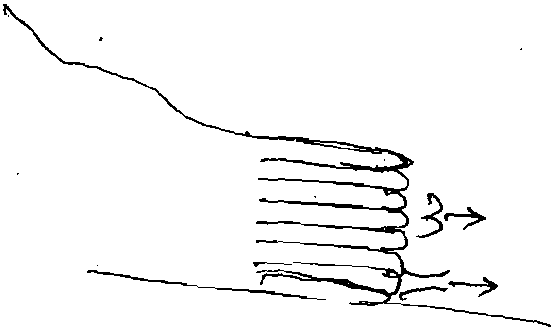

(7) Rupture, excessive deformation, or buckling of face elements or failure of connections.

(1) Deep-Seated failure: For the case of poor backfill material (behind the reinforced earth) and soft foundation Strata, a deep-seated Circular failure surface could form. For this case, Conventional slope stability analysis, eg, using the meth of slices, yields a safety factor according to the definitio

$$F = \frac{\text{resisting moment}}{\text{driving moment}} = \frac{\text{moment of shear strength along fail arc}}{\text{moment of wt. a failure}}$$

www.vtufastupdates.com

N_c, N_q & N_γ are Bearing Capacity factors.

Coefficients S – Shape
i – load Inclination
d – depth factors

g & b are Slope of ground Surface & the Inclination of the base into account.

→ The eccentricity of the resultant load on the base, the presence of groundwater and any Stratification of the SubSoil will also have to be considered.

→ It is Suggested that the Standard analysis of Shallo footings be followed.

Sliding: Sliding of the reinforced soil mass is another type of external failure which can be analysed using Conventional methods. The base of the reinfo block of Soil is normally placed at some depth below the ground Surface at the toe so that so passive resistance may also be relied upon.

Overturning: A type of failure analogous to the overturning of a Conventional retaining wall.

www.Jntufastupdates.com

It is assumed that an active failure wedge develops and full "wall friction" is mobilized along the back face of the reinforced earth mass. This failure mode implies that distortion of the Reinforced earth mass occurs, or in other words, internal failure by slippage of the reinforcement takes place simultaneously. In the standard design of Reinforced earth walls it is considered sufficient to show an adequate safety factor against slippage of the reinforcement in order to exclude the possibility of this type of block failure taking place.

www.Jntufastupdates.com

11.0 References

(1) Strengthened / reinforced soils and other fills – BS 8006 : 1995.
(2) Engineering with Geosynthetics – G.V.S.Venkatappa Rao, G.V.S. Suryanarayan Raju.
(3) Mechanics of Reinforced soil – Andrzej Sawicki.
(4) Geosynthetic application in civil engineering – G.V Rao & S.P Kaushish.
(5) Earth Reinforcement and Soil Structures – Colin JFP Jones.
(6) Use of Geosynthetics in India Experiences and Potential – Astate – of – the – Art Report.
(7) Indian Geotechnical Journal, Vol. 26, No. 1,January 1996.
(8) Case Histories of Geosynthetics in Infrastructure Projects – G.N. Mathur, G.V.Rao & Dr.A.S.Chawla.

6.4 Fasteners and connections

Fasteners and connections are often necessary in reinforced soil structures, particularly where reinforcing elements are connected to some form of facing. Appropriate materials factors should be applied to the strength of the connection in the same way as for the reinforcing elements.

6.5 Design Information:

In order to develop the design of reinforced soil structure the following:
Information is required to be evaluated:

(A) Site investigation
(B) Environmental consideration
(C) Load combination
(D) Design record

(A) Site investigation:

In site investigation initial field study , ground investigation and its field study report should be considered in design and in some case (construction over soft soil) investigation during construction should be monitor

i) Initial field study

The availability and characteristics of the potential local fill materials should be accessed together with details of local drainage.

ii) Ground investigation

i) Area of investigation
- ground conditions
- behaviour of the foundation strata under the imposed loads
- information of settlement(total & differential)

ii) Ground water investigation

- Ground water conditions (pH and chemical content of ground water may affect the durability of reinforcing elements, fasteners & facing).
- Fluctuations in ground water regime may affect the overall structural behaviour.

iii) Field study report

Site investigation report should contain the relevant design parameters for the appropriate structure. The fill or ground material which is proposed to be used in structure should be tested for particle size distribution ,short and long term strength parameters and consolidation parameters where applicable should be included.

www.Jntufastupdates.com

9.0 Test Properties For Design

As such a typical list of important properties of geosynthetics required for reinforcement function may thus include :-

1. Basic Physical Properties
   - Constituent material and method of manufacture
   - Mass per unit area
   - Thickness
   - Roll width, roll length

2. Mechanical Properties
   - Tensile strength
   - Tensile modulus
   - Seam strength
   - Interface friction
   - Fatigue resistance
   - Creep resistance

3. Hydraulic Properties
   - Compressibility
   - Opening size
   - Permittivity
   - Transmissivity

4. Constructability/survivability Properties
   - Strength and stiffness
   - Tear resistance
   - Puncture resistance
   - Penetration resistanee
   - Burst resistance
   - Cutting resistance
   - Inflammability
   - Absorption

5. Durability (Longevity)
   - Abrasion resistance
   - Ultra-violet stability
   - Temperature stability
   - Chemical stability
   - Biological stability
   - Wetting & drying stability

All these may not be important for every application. For design purpose ultimate tensile strength, partial factor of safety for environment and creep reduction factor are required.

7.0 Design of reinforced earth retaining walls

The aim of design is to achieve of an acceptable probability that designed structures will perform satisfactorily during their intended life. With an appropriate degree of safety, they should sustain all the loads and deformations of normal construction and use along with adequate durability and resistance to the effects of misuse and fire etc.

Design of reinforced earth structure investigate two main eriteria to develop the dimensions and layout of the reinforced earth structure. The external stability of a reinforced soil wall is easily investigated since it behaves as a rigid gravity structure and conforms to the simple laws of statics. The analysis of internal stability is essentially one of designing reinforcement against tension failure and ensuring that it has a sufficient anchorage length into the stable soil.

Design methods are based on both limit equilibrium and limit state approaches and most common methods of design are described as under:

7.1 Design of walls and abutments

Vertical walls and associated abutment structures can be constructed using horizontal grid reinforcement as shown in Fig. 15

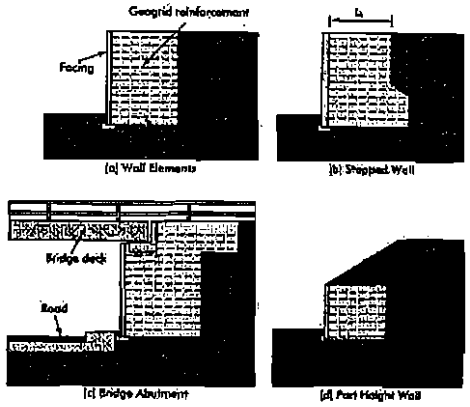


Fig 15 : Different strueture with grid reinforcement

www.Jntufastupdates.com



(e) View of reinforced earth embankment

Fig . : 31

The flow diagram of the design procedure is shown in Fig 18

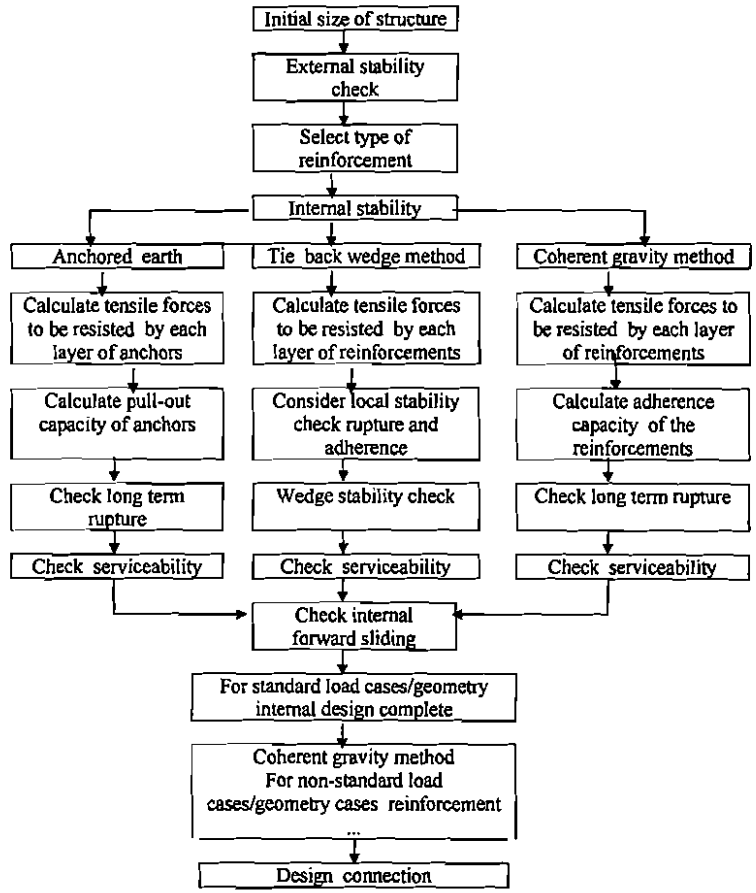


Fig 18 : Design Procedure for reinforced soil walls

Generally two design methods are identified for internal stability

i) Tie-back wedge method
ii) Coherent Gravity method

www.Jntufastupdates.com

Design principle of Reinforced earth wall:

Service life: most cases the selected design life of the reinforcing elements is equal to the service life of the structure.

for: temporary works – 1 to 2 yrs.
Short term – 5 to 10 yrs.
Industrial – 10 to 50 – Mining Structures.
Longterm – 60 yrs – Marine & highway Struct
70 " – RE wall
120 " – Highway Retaining wall and highway Structure & bridges abutment.

FOS: The partial factor are required to be applied at appropriate stage in the design to obtain overall FOS to the reinforced Structure.

→ Partial factor for design tensile strength

① metallic Reinforcement: $T_D = T_U / f_m$. $f_m = 1.5$ (for plain / galvanized steel)

② polymeric Reinforcement: $T_D = T_{CR} / f_m$ (or) T_{DS} / f_m

www.Jntufastupdates.com

③ Soil : $C_d = C_k / f_{ms}$ (This factor is applied to soil parameters C & ϕ).


④ FO

external sliding : FOS for sliding = $\frac{\text{Resisting force}}{\text{Sliding force}}$


target fos = 2.0 (generally).

$= \frac{2\mu(\gamma_w H + W_s)}{K_{ab}(\gamma_b H + 2W_s)\left(\frac{H}{L}\right)}$.

μ – Coefficient of friction on the base of the reinforced soil block ($\tan\phi_w$ (or) $\tan\phi_f$)

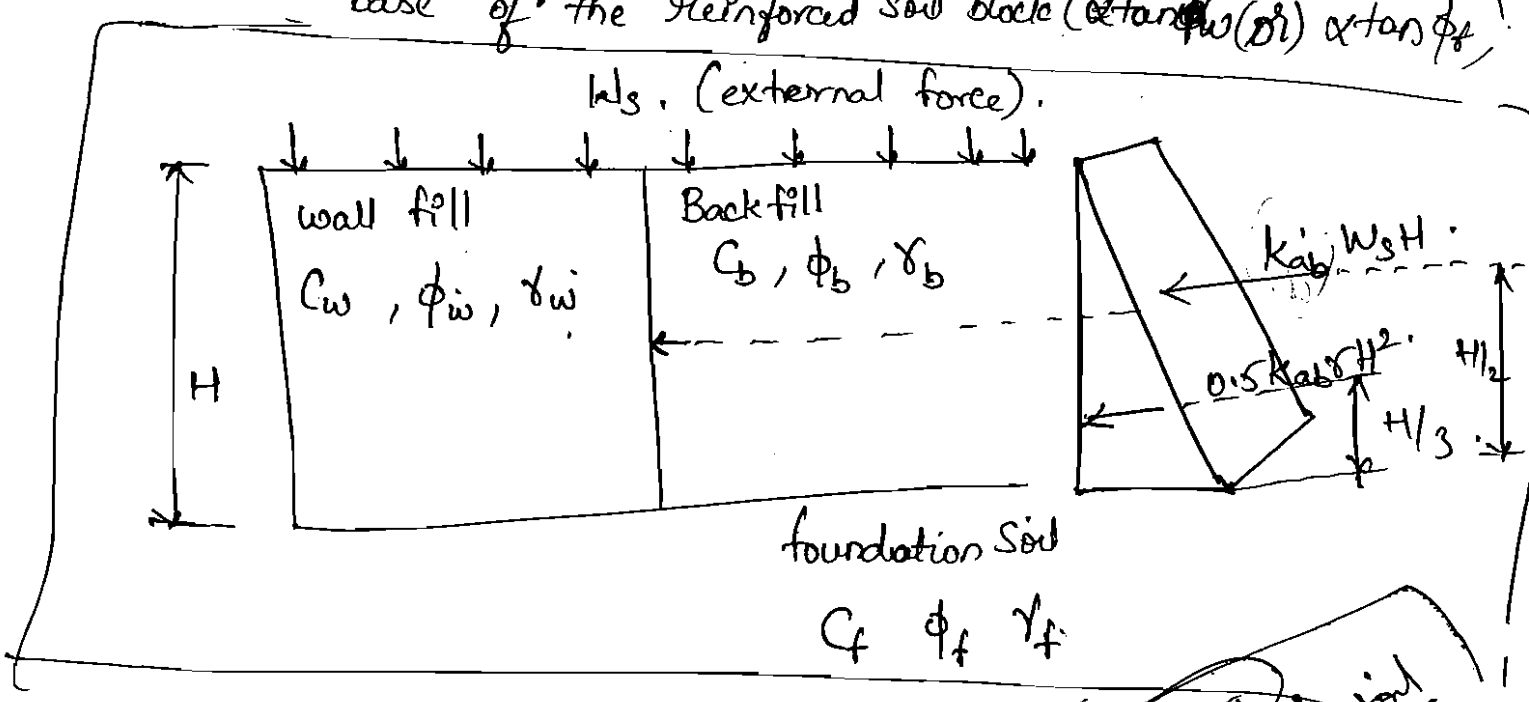

$K_{ab} = \frac{1 - \sin\phi_b}{1 + \sin\phi_b}$ (Rankine)

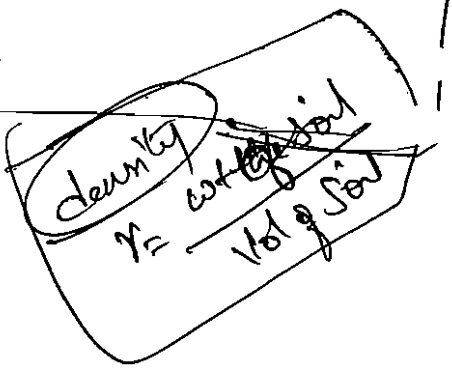

overturning failure :

$FOS = \frac{\text{Restoring moment}}{\text{overturning moment}} = \frac{3(\gamma_w H + W_s)}{K_{ab}(\gamma_b H + 3W_s)\left(\frac{H}{L}\right)^2}$.

www.Jntufastupdates.com

Slip failure : FOS = 1.5

FOS against Slippage : $F_S = \frac{T_r}{T_d} \Rightarrow = \frac{\text{max pulling force of strip}}{\text{Tension developed in Strip.}}$

www.Jntufastupdates.com

V. Jagadeesh